

JUNCTION BOXES

AND ACCESSORIES

COLTAC



UNIKA PLANK

Installation boxes	03
Junction boxes	06
Accessories	14

SMARTBOX

Installation boxes	16
Junction boxes	20
Accessories	21

MB001

PLK5001500

Installation box PP 850°C self-extinguishing for concrete walls with screws UNIKA PLANK MB001



External dimensions	Ø70mm, H=46mm
Internal dimensions	Ø65mm, H=45mm
Color	Lime green
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Galvanized screws.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

MB003

PLK5103500

Installation box PP 850°C self-extinguishing for concrete walls connectable deep with screws



External dimensions	Ø70mm, H=60mm
Internal dimensions	Ø65mm, H=59mm
Color	Lime green
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Galvanized screws.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

MB002

PLK4002400

Installation box PP 850°C self-extinguishing for hollow walls connectable with screws



MB005

PLK4005400

Installation box PP 850°C self-extinguishing for hollow walls connectable deep with screws



External dimensions	Ø70mm, H=46mm
Internal dimensions	Ø65mm, H=45mm
Color	Yellow
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Galvanized screws, Galvanized bolts with triple-thread, Galvanized mounting claws.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

External dimensions	Ø70mm, H=60mm
Internal dimensions	Ø65mm, H=59mm
Color	Yellow
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Galvanized screws, Galvanized bolts with triple-thread, Galvanized mounting claws.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

MB101

PLK6101500

Junction box for Flush-mounting Ø70 PP 850°C self-extinguishing for concrete walls with lid



External dimensions	Ø70mm, H=40mm
Internal dimensions	Ø68mm, H=39mm
Color	Lime green
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Lid with latche
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

MB103

PLK6103500

Junction box for Flush-mounting Ø100 PP 850°C self-extinguishing for concrete walls with lid



External dimensions	Ø101mm, H=49mm
Internal dimensions	Ø96mm, H=47mm
Color	Lime green
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Lid with latche
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

MB102

PLK6002400

Junction box for Flush-mounting Ø80 PP 850°C self-extinguishing for hollow walls with lid



External dimensions	Ø88mm, H=48mm
Internal dimensions	Ø76mm, H=47mm
Color	Yellow
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	Galvanized bolts with triple-thread, Galvanized mounting claws, Lid with latches.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB004

PLK6404650

Junction box for Surface-mounting Ø80x40mm PP self-extinguishing 850°C IP55 with cable glands



External dimensions	Ø79mm, H=50mm
Internal dimensions	Ø69mm, H=44mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	4 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB401

PLK4010850

Junction box for Surface-mounting 90x90x52mm PP self-extinguishing 850°C IP55 with rubber cable glands



External dimensions	91x91mm, H=52mm
Internal dimensions	77x77mm, H=47mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB402

PLK4020850

Junction box for Surface-mounting 90x90x52mm PP self-extinguishing 850°C IP54 with cable inputs



External dimensions	91x91mm, H=52mm
Internal dimensions	77x77mm, H=47mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP54
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB403

PLK4030850

Junction box for Surface-mounting 90x90x52mm PP self-extinguishing 850°C IP55 with smooth sides



External dimensions	91x91mm, H=52mm
Internal dimensions	77x77mm, H=47mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB401vintage

PLK401V850

Junction box for Surface-mounting 90x90x52mm PP self-extinguishing 850°C IP55 with rubber cable glands UNIKA PLANK black



External dimensions	91x91mm, H=52mm
Internal dimensions	77x77mm, H=47mm
Color	Black
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB601

PLK6010850

Junction box for Surface-mounting 114x114x57mm PP self-extinguishing 850°C IP55 with rubber cable glands



External dimensions	113x113mm, H=52mm
Internal dimensions	99x99mm, H=47mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB602

PLK6020850

Junction box for Surface-mounting 114x114x57mm PP self-extinguishing 850°C IP54 with cable inputs



External dimensions	113x113mm, H=52mm
Internal dimensions	99x99mm, H=47mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP54
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB603

PLK6030850

Junction box for Surface-mounting 114x114x57mm PP self-extinguishing 850°C IP55 with smooth sides



External dimensions	113x113mm, H=52mm
Internal dimensions	99x99mm, H=47mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	2 blind covers for mounting hole
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB601vintage

PLK601V850

Junction box for Surface-mounting 114x114x57mm PP self-extinguishing 850°C IP55 with rubber cable glands



External dimensions	113x113mm, H=52mm
Internal dimensions	99x99mm, H=47mm
Color	Black
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB1001

PLK10010850

Junction box for Surface-mounting 150x116x67mm PP self-extinguishing 850°C IP55 with rubber cable glands



External dimensions	150x116mm, H=67mm
Internal dimensions	136x102mm, H=57mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	10 cable glands, 4 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB1003

PLK10030850

Junction box for Surface-mounting 150x116x67mm PP self-extinguishing 850°C IP55 with smooth sides UNIKA PLANK IB1003



External dimensions	150x116mm, H=67mm
Internal dimensions	136x102mm, H=57mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	4 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB1001vintage **PLK1001V850**

Junction box for Surface-mounting 150x116x67mm PP self-extinguishing 850°C IP55 with rubber cable glands



External dimensions	150x116mm, H=67mm
Internal dimensions	136x102mm, H=57mm
Color	Black
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	10 cable glands, 4 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB005 **PLK6505650**

Junction box for Surface-mounting 85x85x40mm PP self-extinguishing 850°C IP55 with cable glands



External dimensions	89x89mm, H=51mm
Internal dimensions	76x76mm, H=44mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	7 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB006

PLK6506650

Junction box for Surface-mounting
100x100x50mm PP self-extinguishing 850°
C IP55 with cable glands



External dimensions	101x101mm, H=56mm
Internal dimensions	88x88mm, H=49mm
Color	Grey
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	8 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

IB006vintage

PLK6506550

Junction box for Surface-mounting
100x100x50mm PP self-extinguishing
850°C IP55 with cable glands



External dimensions	101x101mm, H=56mm
Internal dimensions	88x88mm, H=49mm
Color	Black
Installation type	Surface-mounting
Protection level	IP55
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	8 cable glands, 2 blind covers for mounting holes.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

MBSC

PLK1000500

Signal cover



External dimensions	65mm
Internal dimensions	
Color	Red
Installation type	
Protection level	
Material	
Nominal voltage	
Self-extinguishing temperature	
Includes	
Norms	
Country of origin	Ukraine

MB200

PLK2000500



External dimensions	65*12mm
Internal dimensions	
Color	White
Installation type	
Protection level	
Material	Polypropylene
Nominal voltage	
Self-extinguishing temperature	
Includes	
Norms	
Country of origin	Ukraine

IB001

PLK0010850

Rubber cable gland 25mm IP55

SC UWO 14

PLK4002400

Cable clips PP self-extinguishing 650°C
SMART CONNECT for cable up to 14mm



External dimensions	25mm
Internal dimensions	
Color	Grey
Installation type	
Protection level	IP55
Material	
Nominal voltage	
Self-extinguishing temperature	
Includes	
Norms	
Country of origin	Ukraine

External dimensions	16mm
Internal dimensions	4-14MM
Color	Grey
Installation type	Flush-mounting
Protection level	
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	
Norms	
Country of origin	Ukraine

OS60F

PLK5001500

Installation box PP 650°C self-extinguishing for concrete walls



External dimensions	Ø66mm, H=42mm
Internal dimensions	Ø60mm, H=40mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OS60Fs

PLK4002400

Installation box PP 650°C self-extinguishing for concrete walls with screws



External dimensions	Ø66mm, H=42mm
Internal dimensions	Ø60mm, H=40mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	Galvanized screws
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OC60F

PLK5001500

Installation box PP 650°C self-extinguishing for concrete walls connectable



External dimensions	Ø66mm, H=42mm
Internal dimensions	Ø60mm, H=40mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OC60Fs

PLK4002400

Installation box PP 650°C self-extinguishing for concrete walls connectable with screws



External dimensions	Ø66mm, H=42mm
Internal dimensions	Ø60mm, H=40mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	Galvanized screws
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OS60FD

PLK5001500

Installation box PP 650°C self-extinguishing for concrete walls deep



External dimensions	Ø66mm, H=63mm
Internal dimensions	Ø60mm, H=61mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OS60FDs

PLK4002400

Installation box PP 650°C self-extinguishing for concrete walls deep with screws



External dimensions	Ø66mm, H=63mm
Internal dimensions	Ø60mm, H=61mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	Galvanized screws
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OC60FD

PLK5001500

Installation box PP 650°C
self-extinguishing for concrete walls
connectable deep



External dimensions	Ø66mm, H=63mm
Internal dimensions	Ø60mm, H=61mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OC60FDs

PLK4002400

Installation box PP 650°C self-extinguishing
for concrete walls connectable deep with
screws



External dimensions	Ø66mm, H=63mm
Internal dimensions	Ø60mm, H=61mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	Galvanized screws
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

OHC60Fs

PLK5001500

Installation box PP 650°C
self-extinguishing for hollow walls
connectable with screws



External dimensions	Ø74mm, H=41mm
Internal dimensions	Ø65mm, H=40mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	Galvanized screws, Galvanized bolts with triple-thread, Galvanized mounting claws.
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Україна

OS80F

PLK4002400

Junction box for Flush-mounting Ø80 PP
650°C self-extinguishing for concrete walls
with lid



External dimensions	Ø86mm, H=51mm
Internal dimensions	Ø80mm, H=49mm
Color	Orange
Installation type	Flush-mounting
Protection level	IP30
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	Lid with latches
Norms	ДСТУ IEC 60670-1:2015, ДСТУ EN 60695-2-11:2018 p.4-11
Country of origin	Ukraine

BHJ

PLK5001500

Connector for boxes for hollow walls




External dimensions	
Internal dimensions	
Color	Blue
Installation type	Flush-mounting
Protection level	
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	850°C
Includes	
Norms	
Country of origin	Ukraine

SC60

PLK4002400

Signal cover SMARTBOX SC60

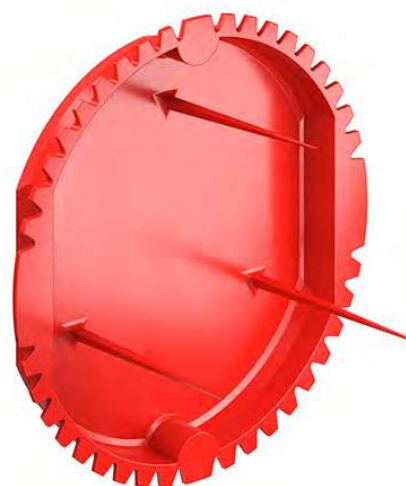

External dimensions	65mm
Internal dimensions	
Color	Red
Installation type	
Protection level	
Material	
Nominal voltage	
Self-extinguishing temperature	
Includes	
Norms	
Country of origin	Ukraine

DR60x12

PLK5001500

SC UWO 14

PLK4002400

Cable clips PP self-extinguishing 650°C
SMART CONNECT for cable up to 14mm



External dimensions	65*12mm
Internal dimensions	
Color	White
Installation type	
Protection level	
Material	Polypropylene
Nominal voltage	
Self-extinguishing temperature	
Includes	
Norms	
Country of origin	Ukraine

External dimensions	16mm
Internal dimensions	4-14mm
Color	Grey
Installation type	Прихований
Protection level	
Material	Polypropylene
Nominal voltage	440 V
Self-extinguishing temperature	650°C
Includes	
Norms	
Country of origin	Ukraine

**77316, Ivano-Frankivsk region,
Kalush district, Voynyliv,
B. Khmelnytsky Street, building No. 10**

**+380 93 412 66 75
info@zes-ua.com**